

## PST-60HL, Plate Shaker-Thermostat



### DESCRIPTION

Plate Thermo-Shakers are designed for shaking and thermostating 2 standard 96-well microplates.

A multisystem principle, used in design of the Thermo-Shaker, allows operating it as 3 independent devices:

- Incubator;
- Microplate shaker;
- Thermo-Shaker.

A distinctive feature of Biosan Plate Thermo-Shakers is the **patented by the company Two-Side Microplates Heating**, which allows to achieve full correspondence of the set and actual temperature in the microplate wells.

Thermo-shaker provides heating up to 60°C, which is sufficient for carrying out ELISA tests.

Plate Shaker-Thermostat provides:

- Soft or intensive sample shaking
- Rotation speed regulation, stabilization and indication
- Even rotation amplitude throughout the Thermo-Shaker platform
- Required operation time setting and indication
- Automatic stopping of the platform movement after expiration of the set time
- Setting and indication of the required temperature on the platform
- **Automatic fault diagnostics (temperature sensor, platform heating, lid heating etc.).\***

Application fields:

- Cytochemistry — for in situ reactions
- Immunochemistry — for immunofluorescent reactions
- Biochemistry — for enzyme and protein analysis
- Molecular biology — for micro array analysis

#### Temperature Calibration Function\*

With the help of the temperature calibration function the user can calibrate the unit approx. ±6% of the selected temperature to compensate differences in the thermal behaviour of plates from different manufacturers.


#### \*NEW FUNCTION

### SPECIFICATION

Temperature setting range	+25°C ... +60°C
Temperature control range	+5°C above ambient... +60°C
Temperature setting resolution	0.1°C
Temperature stability	±0.1°C
Temperature uniformity at +37°C	±0.25°C
Temperature calibration coefficient range	0.936...1.063 (± 0.063)
Orbit	2 mm



#### Heat up time PST-60HL and PST-60HL-4

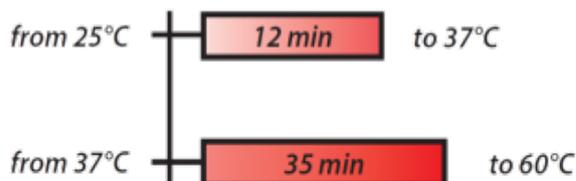

### CAT. NR.

	PST-60HL incl. external power supply unit
BS-010119-AAI	230VAC 50/60Hz Euro plug
BS-010119-AAQ	230VAC 50/60Hz UK plug
BS-010119-AA4	230VAC 50/60Hz AU plug
BS-010119-AAJ	100VAC 50/60Hz US plug
BS-010119-AAJ	120VAC 60Hz US plug
-----	
BS-010119-BK	IQ OQ document
BS-010119-CK	PQ document

## PST-60HL, Plate Shaker-Thermostat



Speed control range	250-1200 rpm (increment 10 rpm)
Digital time setting	1 min-96 hrs / non-stop* (increment 1 min)
Display	LCD, 16 x 2 signs
Max. height of microtest plate	18 mm
Number of microtest plates	2
Patented two-side microplate heating	+
Weight	6.1 kg
Platform dimensions (w x d)	250 x 150 mm
Overall dimensions (WxDxH)	270 x 260 x 125 mm
Input current/power consumption	12 V DC, 3.3 A / 40 W
External power supply	Input AC 100-240 V; 50/60 Hz; Output DC 12 V
* Timer range can be reprogrammed on customers demand	+